


- A Concealed Fixing type; **no screw fixing** for roof sheet to purlin; **no water leak**.
- Full **SINGLE PIECE** roof length upto **120m** with no end lap joints.
- Safe in strong typhoon upto a wind speed of **300km/hr**.
- No overflow even with **3% roof slope**.
- Heat expansion NOT transferrable to purlin due to Clip: extra safety factor.
- A weather proof system: resulting in **no air leak**; savings in air-conditioning.



The Only Roofing System That Locks & Seams

Dimension:

- Width : 470 mm (18 inches)
- Length : Unlimited - site forming
- Full rib height : 66 mm
- Seam type : locks and 360 degree Seams

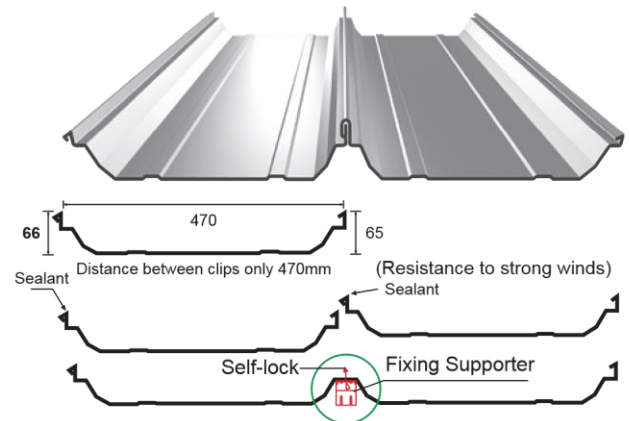

Lokseam Processing @ Site



Lokseam Erection





www.PEBsteel.com

PEB Steel Buildings Co., Ltd

Head Office:

Unit 701, 7th Floor, C.T Plaza, 60A Truong Son St., Ward 2, Tan Binh Dist.,
Ho Chi Minh City, Vietnam.

Tel : (84) (28) 3 8 475 475 Fax: (84) (28) 3 8 476 476

Factories:

Dong Xuyen Industrial Park, Ba Ria Vung Tau Province, Vietnam.

Thilawa Special Economic Zone - TSEZ, Yangon, Myanmar.

Pithampur, Madhya Pradesh State, India.